

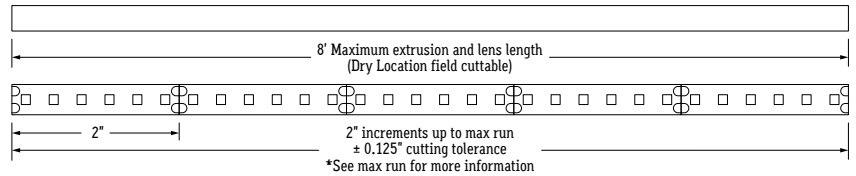


NOT TO SCALE

± .015" tolerance

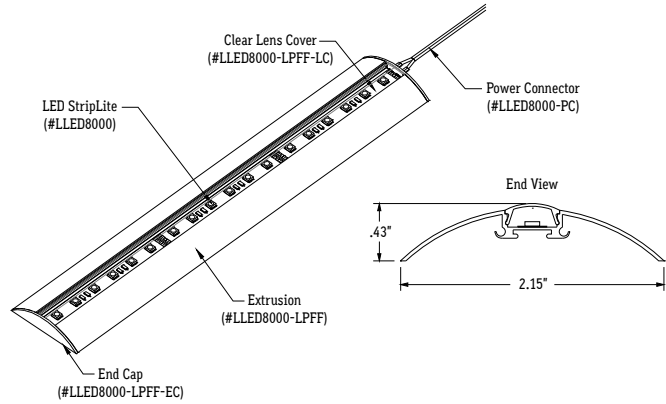

MOUNTING OPTION (Not Included)

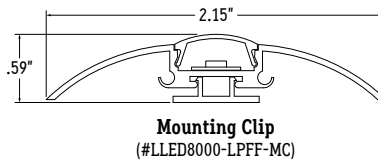

SPECIFY PRODUCT CODE (Use drop down menu to complete table or fill in the blanks)

LLED8000-LPFF - - - - -

SERIES	OPTICS	WATTS PER FOOT	DIMMING	LAMP	LISTING	FINISH
Ex. LLED8000-LPFF	F	4W	10V	LED-3.5K	DRY	BK
LLED8000-LPFF	Clear Lens (CL)	1.5 Watts (1.5W) (143 Lumens/ft)	Forward Phase (DM) 0-10V (10V)	LED-2.4K LED-2.7K	Indoor (DRY)	Natural Silver (NA)* ²
	50% Semi-Frosted Lens (SF)	2.5 Watts (2.5W) (238 Lumens/ft)	Hi-Lume 1% 2 Wire (2 Wire)* ³	LED-3.0K LED-3.5K	Outdoor IP65 (WET)* ⁷	Polished (PA) White (WH)
	100% Frosted Lens - Line of Light (F)	3.6 Watts (3.6W) (342 Lumens/ft)	Hi-Lume 1% 3 Wire (3 Wire)* ⁴	LED-4.0K LED-4.5K	Outdoor IP67 (WET-IP67)* ⁷	Satin (SA) Black (BK)
		4.5 Watts (4.5W) (428 Lumens/ft)	Hi-Lume Premier 0.1% (L3D0E)* ⁵	LED-A* ⁶ LED-R* ⁶		Green (GN) Red (RD)
		5.5 Watts (5.5W) (523 Lumens/ft)	JA8 0-10V (JA8-10V)	LED-G* ⁶ LED-B* ⁶		Silver (SR)
		6.5 Watts (6.5W) (618 Lumens/ft)	JA8 2 Wire (JA8-2WR)			
			Leave Blank for Non-Dimming			

*¹ Maximum run based on 4 amps for class II applications: 14' (6.5W), 17' (5.5W), 21' (4.5W), 26' (3.6W), 36' (1.5W, 2.5W)
 *² Standard Finish: Natural Silver if left blank
 *³ 40 watt max Lutron Hi-Lume 1% 2 Wire (L3DA2W) #L3DA4U1UKL-CV240
 *⁴ 40 watt max Lutron Hi-Lume 1% 3 Wire (L3DA3W) #L3DA4U1UKL-CV240
 *⁵ 96 watt max Lutron Hi-Lume Premier 0.1% (L3D0E) #L3D0-96W24V-U
 *⁶ Only available in 2.5W and 5.5W
 *⁷ Run lengths required for Wet Location and IP67 products (To ensure proper seal)

FEATURES

APPLICATIONS	Accent, Decorative Lighting
VOLTAGE	24VDC
LAMP TYPE	LEDs
DIMMING	Forward Phase 0-10V Lutron
LENGTH	Built to Order
MOUNTING	Mounting Clips or Mounting Channel
CRI	> 90
EFFICACY	95 Lumens per Watt
VIEWING ANGLE	120 Degrees
L70 LED LIFE	60,000 hrs.
MAXIMUM RUN*¹ (Based on 5 amps)	18' (6.5W), 21' (5.5W), 26' (4.5W) 33' (3.6W), 36' (1.5W, 2.5W)
LISTING	Dry or Wet (IP65 or IP67) Location UL2108, CSA C22.2#9 UL8750, CSA250


ELECTRICAL

lipLEDs is a 24 Volt system that requires a 24VDC (secondary side) transformer. The standard primary side voltage on our transformers is 120V or 277V. Consult factory for other primary side voltages. See transformer brochure for additional information.
 lipLEDs remote drivers are available with 120V or 277V primary voltage and 24VDC secondary voltage.



lipLEDs are ETL listed for closet lighting using up to 3.6 watts per foot. The lipLEDs family offers multiple extrusions and color temperatures that can be used for closet lighting. Choose from any of our Class II drivers to make a complete system for your closet space.

ACCESSORIES (Not Included)

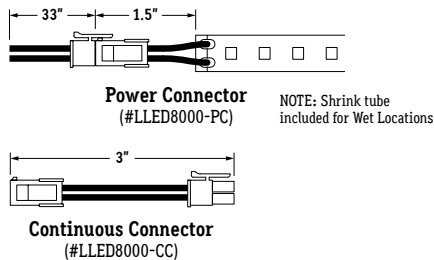

LAMP SPECIFICATIONS

LAMP NUMBER	DESCRIPTION
LED-2.4K	2400K Warm White
LED-2.7K	2700K Warm White
LED-3.0K	3000K Warm White
LED-3.5K	3500K Neutral White
LED-4.0K	4000K Cool White
LED-4.5K	4500K Cool White
LED-A* ⁶	Amber
LED-R* ⁶	Red
LED-G* ⁶	Green
LED-B* ⁶	Blue

Consult factory for cooler white color temperatures



CALIFORNIA ACCENT LIGHTING, INC.
 2034 E. Lincoln Ave. #431, Anaheim, CA 92806
 ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
 info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.



2018.08.27 R7