


FEATURES

- APPLICATIONS** Accent, Decorative Lighting
- VOLTAGE** 24VDC
- LAMP TYPE** Color Changing RGB LEDs
- DIMMING** DMX-512
- LENGTH** Built to Order
- MOUNTING** Mounting Clips or Mounting Channel
- VIEWING ANGLE** 120 Degrees
- L70 LED LIFE** 50,000 hrs.
- MAXIMUM RUN*1** 10' (11W)
(Based on 5 amps) 24' (5W)
- LISTING** Dry Location
UL2108, CSA C22.2#9
UL8750, CSA250

ELECTRICAL

lipLEDs is a 24 Volt system that requires a 24VDC (secondary side) transformer. The standard primary side voltage on our transformers is 120V or 277V. Consult factory for other primary side voltages. See transformer brochure for additional information.

DMX CONTROL SYSTEM (Not Included)

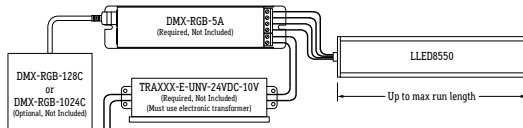

DMX-RGB-5A DMX Decoder is required for DMX color programming. Set DMX address using DIP switches. Compatible with DMX-512 1990 standard protocol. See DMX-RGB-5A for details. DMX-RGB-128C or DMX-RGB-1024C DMX Controller is capable of programming specific colors and scenes via software. See DMX-RGB-128C or DMX-RGB-1024C for details. An electronic transformer must be used to operate the DMX control system. See TRA-E brochure for details.

ACCESSORIES (Not Included)

Click on thumbnail of accessory to see cut sheet, if applicable

Power Connector
(#LLED8500-PC)

DMX Decoder
(#DMX-RGB-5A)

Electronic Transformer
(#TRAXXX-E-UNV-24VDC-10V)
(XXX = Specify Wattage)

DMX Signal Terminator
(#DMX-RJ45-TERMINATOR)



Standard Controller
(#DMX-RGB-128C)

Color Wheel Controller
(#DMX-RGB-1024C)

LAMP SPECIFICATIONS


LAMP NUMBER	DESCRIPTION
LED-RGB	3 Channel Color Changing: Red, Green, Blue

NOT TO SCALE ± .015" tolerance

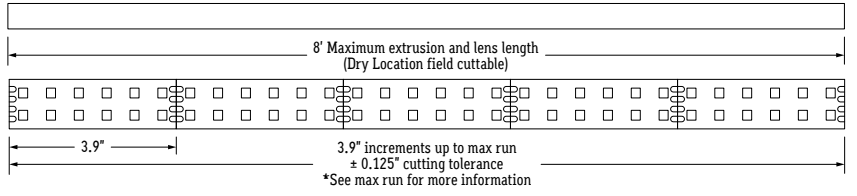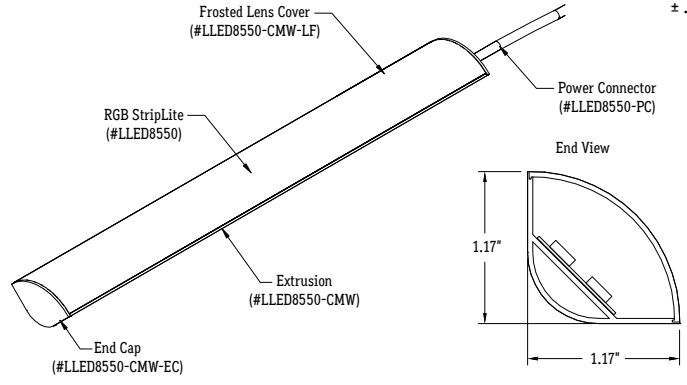

MOUNTING OPTION (Not Included)

Click on thumbnail of mounting clip to see cut sheet



SPECIFY PRODUCT CODE (Use drop down menu to complete table or fill in the blanks)

LLED8550-CMW - - - DMX - LED-RGB - DRY -

SERIES	OPTICS	WATTS PER FOOT	DIMMING	LAMP	LISTING	FINISH
<i>Ex. LLED8550-CMW</i>	<i>F</i>	<i>5W</i>	<i>DMX</i>	<i>LED-RGB</i>	<i>DRY</i>	<i>WH</i>
LLED8550-CMW	Clear Lens (CL)	5 Watts (5W)	DMX-512 (DMX)	LED-RGB	Indoor (DRY)	Natural Silver (NA)*2
	50% Semi-Frosted Lens (SF)	11 Watts (11W)				Polished (PA)
	100% Frosted Lens (F)					White (WH)
						Satin (SA)
						Black (BK)
						Green (GN)
						Red (RD)
						Silver (SR)

*1 Maximum run based on 4 amps for class II applications 8' (11W), 19' (5W)
*2 Standard finish - Natural Silver if left blank