*lip*LEDs™
Specification Grade

MODEL NUMBER LLED**8000-CMW**

FIXTURE TYPE

FEATURES

APPLICATIONS	Accent, Decorative Lighting
VOLTAGE	24VDC
LAMP TYPE	LEDs
DIMMING	Forward Phase (TRA) 0-10V (TRA-E) Hi-Lume 1% (2 Wire) Hi-Lume 1% (3 Wire)
LENGTH	Built to Order
MOUNTING	Mounting Channel
CRI	> 90
EFFICACY	95 Lumens per Watt
VIEWING ANGLE	120 Degrees
L70 LED LIFE	60,000 hrs.
MAXIMUM RUN* (Based on 5 amps)	18' (13W) 21' (11W) 26' (9W) 33' (7.2W) 36' (3W, 5W)
LISTING	Dry or Wet Location

ELECTRICAL

*lip*LEDs is a 24 Volt system. *lip*LEDs requires a 24VDC (secondary side) transformer. The standard primary side voltage on our transformers is 120V or 277V. Consult factory for other primary side voltages. A thermal breaker box can be used for secondary protection. See Transformer Brochure.

ACCESSORIES (Not Included)

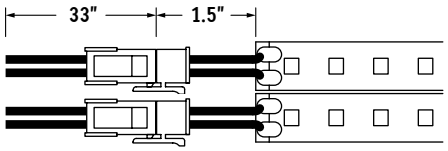

Power Connector
(#LLED8000-PC-2)

Note: Shrink tube included for wet location



Continuous Connector
(#LLED8000-CC-2)

Note: Run lengths required

LED SPECIFICATIONS

LAMP	DESCRIPTION
LED-2.4K	2400K Warm White
LED-2.7K	2700K Warm White
LED-3.0K	3000K Warm White
LED-3.5K	3500K Neutral White
LED-4.0K	4000K Cool White
LED-4.5K	4500K Cool White

Consult factory for cooler white color temperatures. Consult factory for cooler white color temperatures, Red, Green, Blue, and RGB

NOT TO SCALE

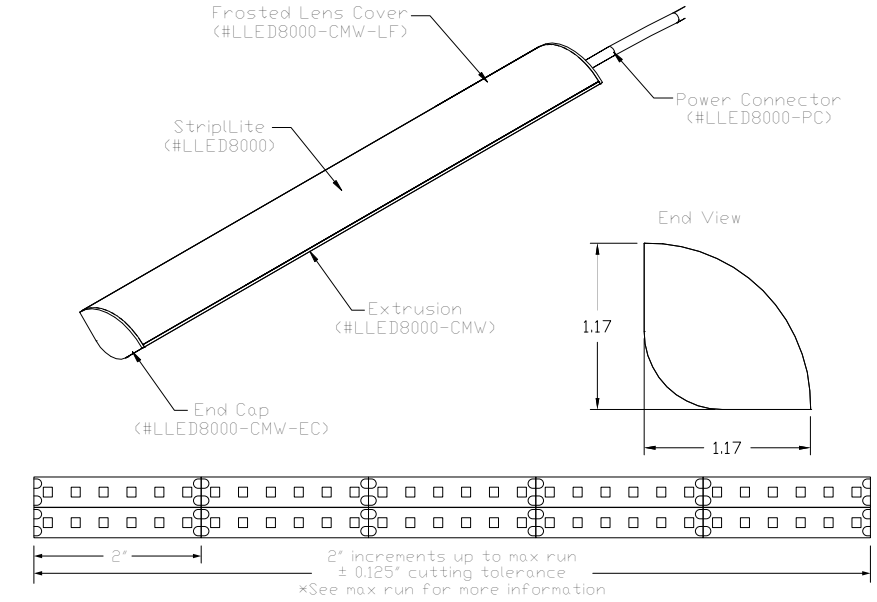

MOUNTING OPTION



Mounting Clip
(#LLED8000-CMW-MC)

HOW TO ORDER OR SPECIFY Product Code: (Fill in the blanks)

LLED8000-CMW - _____ - _____ - _____ - _____ - _____ - _____

SERIES	OPTICS	WATTS PER FOOT	DIMMING	LAMP	DRY OR WET	FINISH
Ex. LLED8000-CMW	*F*	*5W*	*10V*	*LED-4.5K*	*DRY*	*BK*
LLED8000-CMW	Clear Lens (CL)	3 Watts (3W) (285 Lumens/ft)	Forward Phase (DM)	LED-2.4K	Indoor (DRY)	Natural (NA)
				LED-2.7K		Polished (PA)
	50% Semi-Frost Lens (SF)	5 Watts (5W) (475 Lumens/ft)	0-10V (10V)	LED-3.0K	Outdoor (WET)	White (WH)**
				LED-3.5K		Satin (SA)
	100% Frosted Lens (F)	7.2 Watts (7.2W) (684 Lumens/ft)	Hi-Lume 1% (2 Wire)***	LED-4.0K		Black (BK)
				LED-4.5K		Green (GN)
		9 Watts (9W) (856 Lumens/ft)	Hi-Lume 1% (3 Wire)****			Red (RD)
						Silver (SR)
		11 Watts (11W) (1046 Lumens/ft)	Leave Blank for Non-Dimming			
		13 Watts (13W) (1236 Lumens/ft)				

**** 40 watt max Hi-Lume Lutron #L3DA4U1UKL-CV240
*** 40 watt max Hi-Lume Lutron #LTEA4U1UKL-CV240
** Standard finish - White if left blank
* Maximum run based on 4 amps for class II applications: 14' (13W), 17' (11W), 21' (9W), 26' (7.2W), 36' (3W, 5W)

CALI
CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com
© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

2017.06.23 R0